

RG59 SIAMESE WITH 95% COPPER BRAID (DIRECT BURIAL)

Jack2Rack

DESCRIPTION

RG59 Siamese Direct Burial, 20AWG Solid Bare Copper Conductor with 95% CCA Braid, 18AWG (2) Conductors, CL2, CM, Polyethylene Jacket.

FEATURES

- 20AWG Solid Conductor
- 18AWG (2) Conductors
- Direct Burial (Gel Filled)
- Polyethylene Jacket (PE)
- 75 Ohm Impedance
- ISO 9001:2000
- RoHS Compliant
- 1000ft Wooden Spool

SKU: 107-2179/DB/BK

Coax Construction

Conductor	Bare Copper
Diameter	0.81±0.005mm (20AWG)
Dielectric	Foam PE
Diameter	3.660±0.10mm
Braid	Copper Clad Aluminum
Coverage	95%x16x9x0.12±0.005mm
Gel Filled Jacket	Yes (Waterproof)
Diameter	Polyethylene (PE)
	6.10±0.10mm

18AWG/2C


Conductor	Bare Copper
Diameter	7x0.38mm (18AWG)
Insulation	Polythene (Black, Red)
Diameter	1.83mm
Jacket	Polyethylene (PE)
Diameter	4.50±0.10mm

Electrical Characteristics

Sparker Test	3000VAC
Impedance	75±3 Ohm
Capacitance	54±3pF/m
Velocity of Propagation	85%
Return Loss	(1~470Mz)≥25dB (470~1000Mz)≥22dB

Mechanical Characteristics

Operating Temperature Range 60°C

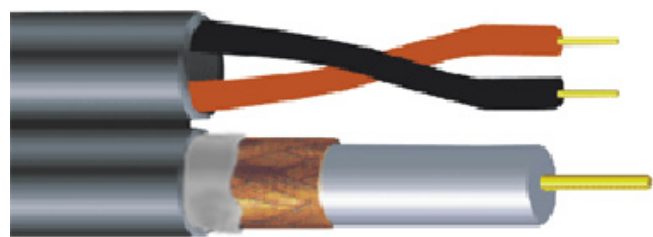

Jack2Rack

Tel: 951 696-5481

Tel: 951 696-5478

Email: sales@jack2rack.com



www.jack2rack.com

Rev. 03/2011