

14AWG 2C AUDIO CABLE DIRECT BURIAL

Jack2Rack

SKU: 209-2320/DB

DESCRIPTION

14AWG, 2 Conductor, Stranded (105 Strand), PVC Jacket, for Direct Burial.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, CL2 Rated
- 500ft Pull Box



Conductor

Material	2 Core (Stranded BC) Oxygen Free Cooper Wire Strands
Size	14AWG
Stranding	105 Strands
Strand Dia.	0.16 mm

Insulation

Material	PVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm

Assembly Dia. (±0.05mm)

5.20mm

Jacket


Material	PVC
Color	Black
Average Thickness	0.95 mm
Min. Point Thickness	0.88 mm
Outer Diameter (±0.1mm)	7.00 mm
Color of Conductor Jacket Ripcord	Black, Red

Color of Conductor Jacket Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature	-20°C - 75°C
Rated Voltage	300V
Reference Standard	ETL Listed

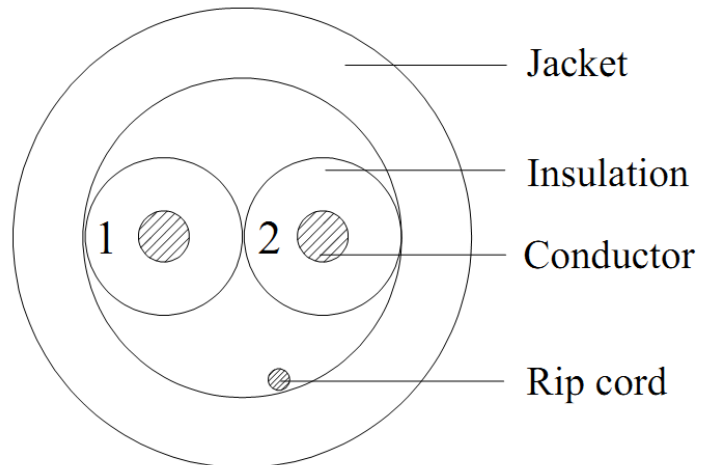

Jack2Rack

Tel: 951 696-5481

Tel: 951 696-5478

Email: sales@jack2rack.com



www.jack2rack.com

Rev. 02/2012