

14AWG 4C AUDIO CABLE DIRECT BURIAL

Jack2Rack

SKU: 209-2321/DB

DESCRIPTION

14AWG, 4 Conductor, Stranded (105 Strand), PVC Jacket, for Direct Burial.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, CL2 Rated
- 500ft Pull Box



Conductor

Material	4 Core (Stranded BC) Oxygen Free Cooper Wire Strands
Size	14 AWG
Stranding	105 Strands
Strand Dia.	0.16 mm

Insulation

Material	PVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm

Assembly Dia. (±0.05mm)

6.20mm

Jacket

Material	PVC
Color	Black
Average Thickness	0.95 mm
Min. Point Thickness	0.88 mm
Outer Diameter (±0.1mm)	8.20 mm


Color of Conductor Jacket Ripcord

Black, Red, Green, Blue

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature	-20°C - 75°C
Rated Voltage	300V
Reference Standard	ETL Listed

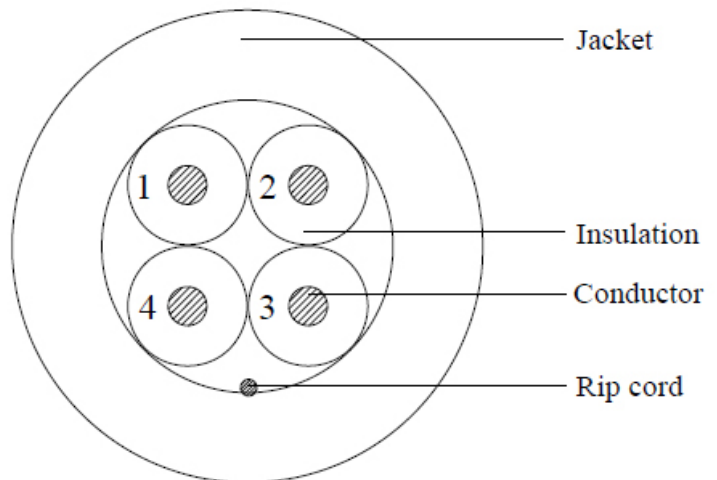

Jack2Rack

Tel: 951 696-5481

Tel: 951 696-5478

Email: sales@jack2rack.com



www.jack2rack.com

Rev. 02/2012