

# RG11 STANDARD SHIELD COAXIAL CABLE

# Jack2Rack

**SKU: 107-1032BK/R11**

## DESCRIPTION

RG11 Standard Shield, 14AWG Solid CCS Conductor, Aluminum Foil with 60% Braid, CL2, CM, PVC Jacket.

## FEATURES

- 14AWG Solid Conductor
- 75 Ohm Impedance
- Flame Retardant PVC Jacket
- Meets NEC Article 820 V Rating
- ISO 9001:2000
- RoHS Compliant
- 1000ft Wooden Spool

## Construction


<b>Conductor</b>	Copper Clad Steel (CCS)
<b>Size</b>	1.63±0.01mm (14AWG)
<b>Dielectric</b>	Foam PE
<b>Size</b>	7.11±0.05mm
<b>Shield</b>	Bonded Aluminum Foil
<b>Braid</b>	Alu-Mag
<b>Coverage</b>	60%x16x4x0.16±0.005mm
<b>Jacket</b>	PVC
<b>Size</b>	10.03±0.2mm

## Electrical Characteristics

Sparker Test	4000VAC
Impedance	75±3 Ohm
Capacitance	54±3pF/m
Velocity of Propagation	85%
Return Loss	20dB min (5-2300MHz)

## Mechanical Characteristics

Operating Temperature Range -40°C to 75°C

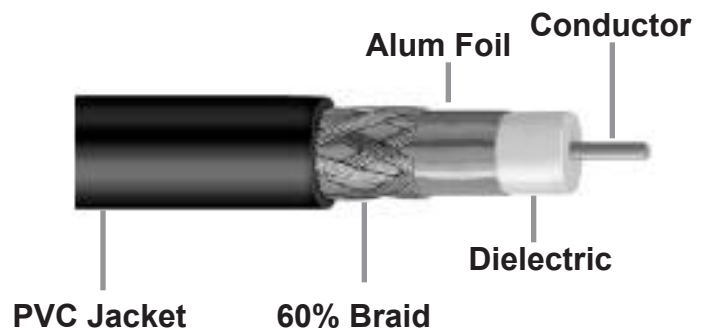

**Jack2Rack**

Tel: 951 696-5481

Tel: 951 696-5478

Email: [sales@jack2rack.com](mailto:sales@jack2rack.com)



[www.jack2rack.com](http://www.jack2rack.com)

Rev. 03/2011