

16AWG 4 CONDUCTOR STRANDED (65 STRAND)

Jack2Rack

DESCRIPTION

16AWG, 4 Conductor, Stranded (65 Strand),
PVC Jacket, Wooden Spool, 1000ft.

FEATURES

- Intercom Systems
- Sound / Audio
- Indoor Applications



SKU: 209-2318

Conductor

Material	4 Core (Stranded BC)
Size	Oxygen Free Cooper Wire Strands
Stranding	16 AWG
Strand Dia.	65 Strand
	0.16 mm

Insulation

Material	PVC
Average Thickness	0.31 mm
Min. Point Thickness	0.27 mm
Insulation Dia. ($\pm 0.05\text{mm}$)	2.10 mm

Assembly Dia. ($\pm 0.05\text{mm}$)

5.10 mm

Jacket

Material	PVC
Color	White
Average Thickness	0.60 mm
Min. Point Thickness	0.54 mm
Outer Dia. ($\pm 0.1\text{mm}$)	6.30 mm

Color of Conductor Jacket


Black, Red, Green, White

Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature ($^{\circ}\text{C}$)	75
Voltage Rating	300V
Reference Standard	ETL, CL3

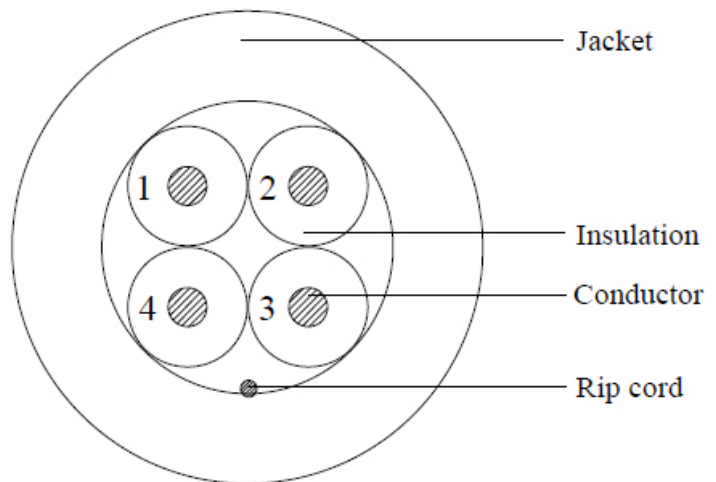

Jack2Rack

Tel: 951 696-5481

Tel: 951 696-5478

Email: sales@jack2rack.com



www.jack2rack.com

Rev. 04/2011